
WASTEWATER TREATMENT PLANTS CLEANNY RANGE 20 – 100

Comprehensive range of packaged WWTP

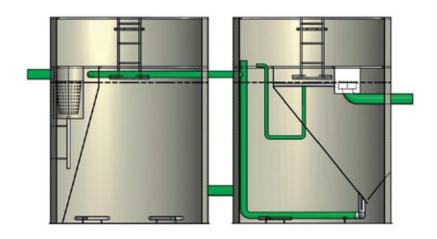

SIMPLE ACQUISITION

The price includes all technologies and the blower

SIMPLE ASSEMBLY


When you receive your WWTP, all you have to do is to place it in the excavated trench, connect inflow, outflow and blower, and that's it

MATERIAL FOR PROJECT DOCUMENTATION AVAILABLE FREE OF CHARGE

Including consultation

SIMPLE AND RELIABLE OPERATION



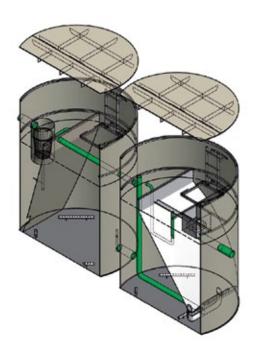

Containing no electronics (except for the blower), the WWTP features minimum presence of failures.

As a comprehensive range of WWTP, the technology is identical in all of them. Therefore, you will have no problems to deal with even if you are responsible for several WWTPs of the range.

The wastewater treatment plants are produced in standard height. However, if necessary, we can provide for a higher plant or add an extension to standard height.

WWTP 20 to WWTP 50 are produced as one vessel. Larger WWTPs (65, 75, 85, 100) are produced as two communicating vessels.

BASIC PARAMETERS OF THE RANGE OF CLEANNY WASTEWATER TREATMENT PLANTS

CLEANNY WWTP		20	30	40	50	65	75	85	100
IE Capacity	IE*	8-22	12-33	16-44	20-55	26-71	30-82	34-93	40-110
Volume	WW	1,6-5,0	2,3-7,4	2,7-9,9	3,2-8,3	5,0-16	5,6-18,5	6,3-20,9	6,8-24,8
Indicative input Power	W	130	550	750	750	750	750	750	750
Diameter	mm	2000	2400	2500	2500	2x 2200	2x 2400	2x 2400	2x 2400
Height	mm	2300	2300	2500	3000	2550	2550	2700	3000
Water Level	mm	1750	1900	2200	2700	2150	2150	2300	2600

^{*}IE - inhabitant equivalent (permanently connected), WW (wastewater) volume is indicated in m3.

If required, WWTP dimensions can be adjusted to meet the specific layout situation.



